

Hardy Hemp

- 3 Strand Spun Staple Polypropylene

Special Features

Long lasting
Traditional appearance
UV Resistant
Floats

Yachting Applications

Halyards
Control Lines
General Purpose

Other Applications

General Rigging
General Purpose



UV Resistance

UV Stabilised 50% strength retention after 2.5 years

Standard Lengths

100m & 200m reels

Recommended Splice

Easily spliced using 3 strand method

Chemical Resistance*

Excellent resistance to Acids and Alkalies

Part Number Ref.

BY****

Colours

Natural Hemp

Sheave Diameters

10:1 or ten times rope diameter

Working Loads

Maximum loads should not exceed 50% of the breakload published.

Normal expected working loads should not exceed 20 - 30% of the break load published.

As a guide working loads can be calculated using formulas available on request.

Relative Density to H₂O

0.91

Critical Temperatures

Melts at 170°C

* more detailed information available on "Technical Data - Material" sheet

Marlow Ropes Ltd South Road, Hailsham, East Sussex, BN27 3JS, England

Tel : +44(0)1323 847234
e-mail : technical@marlowropes.com

Fax : +44(0)1323 440093
Website : www.marlowropes.com




Technical Data

Marlow

Sizes / Breaks / Weights

Diameter		Ave Break Load		Min Break Load		Weight	
(mm)	(Inches)	(kg)	(lbs)	(kg)	(lbs)	(kg/100m)	(lbs/100ft)
6	7/32	390	860	300	660	1.50	1.01
8	5/16	640	1411	500	1100	2.80	1.88
10	7/16	1030	2271	950	2090	4.50	3.02
12	1/2	1470	3241	1360	2992	6.20	4.17
14	9/16	2020	4453	1910	4202	8.10	5.44
16	5/8	2870	6327	2500	5500	11.70	7.86
18	3/4	3330	7341	3170	6974	14.00	9.41
20	13/16	4470	9855	4220	9284	19.40	13.04
24	1	5940	13095	4930	10846	26.30	17.64

Load Vs Extension Characteristics

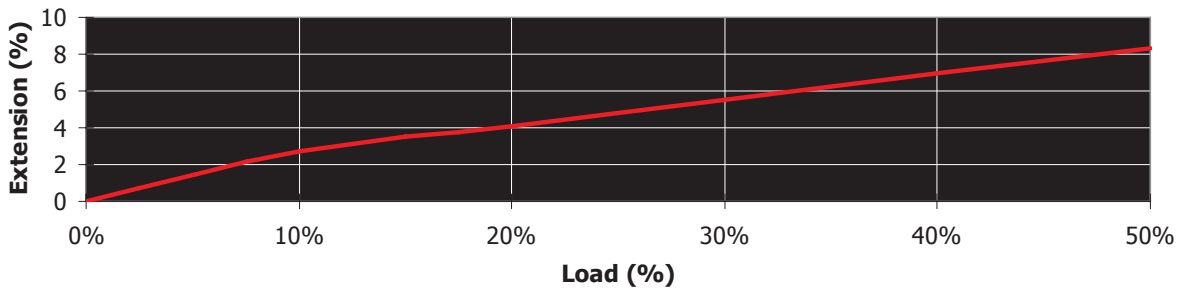

Additional Notes:

Additional Notes:

Disclaimer

Marlow Ropes Ltd endeavor to ensure that all rope products are manufactured to the highest standard, these guidelines are not intended and do not create any warranties, express or implied. Marlow Ropes Ltd expressly disclaims warranties or representations of any kind, express or implied, including the implied warranties of merchantability and fitness for a particular purpose. Marlow Ropes Ltd shall not be liable for any consequential, incidental or contingent damages whatsoever stemming from the use of these guidelines. Marlow Ropes Ltd has a policy of continual improvement which may result in specification and colour changes without prior notice.

Hardy Hemp

